

November 2021

Spence™ N125 Series Thermostatic Steam Traps

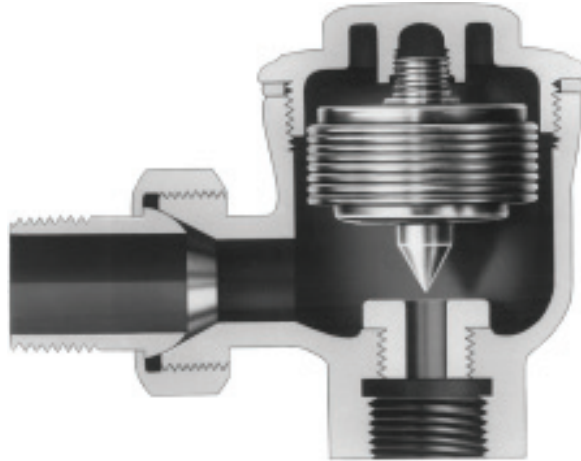


Figure 1. N125 Series Thermostatic Steam Traps

Features

- **Superior Performance** - Hardened valve and seats are lapped in matched sets, providing tight shutoff and long service life.
- **Improved Energy Savings** - Maximum elimination of air and non-condensibles - trap is closed at saturated steam temperature.
- **Temperature Sensitive Actuators** - One moving part. Stainless Steel, fail open or fail closed, welded actuator for maximum corrosion, thermal and hydraulic shock resistance.
- **Freeze Proof** - Threaded male union horizontal inlet and vertical outlet-self draining.
- **In-line Maintenance** - Threaded cover for one step removal, inspection and service without breaking pipe connections.
- **Air Vent** - Efficient steam service air vent when equipped with ISO Bellows and installed in air vent location.

Introduction

A steam trap is an automatic valve which discharges condensate, undesirable air and non-condensibles from a system while trapping, or holding in, steam. Thermostatic steam traps operate in direct response to the temperature within the trap.

N125 Series steam trap is a balanced pressure design with stainless steel welded actuator capable of discharging condensate within 10°F / -12°C of saturated temperature.

For greater sensitivity, SLR orifice and sterilizer trim are available to allow condensate evacuation at or near saturated temperatures. If subcooling of condensate is desired, alternate thermostatic actuator is available to allow condensate evacuation at or near 40°F / 4.4°C below saturated temperatures.

Thermostatic actuator has a conical valve lapped in matched sets with the seat ring assuring tight shut off. A minimum of three orifice sizes is available allowing for custom capacity sizing. Trap is bronze-bodied suitable for pressures through 125 psig / 8.62 bar and available in NPS 3/8 to 3/4 / DN 10 to 20 connections.

N125 Series

Specifications

This section lists the specifications for the N125 Series. Factory specifications are stamped on the nameplate fastened on the steam trap at the factory.

<p>Available Configuration⁽¹⁾ Type N125: Standard capacity Type N125L: Low capacity Type N125HC: High capacity Type N125ST-FC: Standard capacity with sterilizer seat Type N125STHC-FC: High capacity with sterilizer seat</p> <p>Body Size NPS 3/8, 1/2 and 3/4 / DN 10, 15 and 20</p> <p>Maximum Operating Pressure⁽²⁾ 125 psig / 8.75 bar g</p> <p>Maximum Allowable Pressure⁽²⁾ 125 psig / 8.75 bar g</p> <p>Maximum Operating Temperature⁽²⁾ 400°F / 204°C</p> <p>Maximum Allowable Temperature⁽²⁾ 400°F / 204°C</p> <p>Capacity Information See Table 1</p>	<p>Materials of Construction Body and Cover: Brass Actuator: Welded Stainless Steel Cover Gasket: Copper Jacketed Valve and Seat: Hardened 416 Stainless Steel</p> <p>Applications Steam Tracing Drip Legs Automatic Air Vents Sterilizers Cooking Kettles Water Heaters Laundry Equipment Radiators Process Equipment Air Handlers</p> <p>Options ST: Sterilizer Trim (1/4 and 5/16-inch orifice sizes) SLR: SLR Orifice S: Internal Stainless Strainer ISO: ISO Filled Actuator HC: High Capacity</p> <p>Approximate Weight See Table 2</p>
--	--

1. Add (-FC) for fail closed or (-FO) for fail open to end of model number

2. The pressure/temperature limits in this Bulletin and any applicable standard or code limitation should not be exceeded.

Principle of Operation

Thermal actuator is filled at its free length with a liquid having a lower boiling point than water. On start-up, valve is normally open. When steam enters trap, thermal actuator fill vaporizes to a pressure higher than line pressure. This forces valve into seat orifice to prevent any further flow. As condensate collects, it takes heat from thermal actuator, lowering internal

pressure. Line pressure will then compress thermal actuator to open valve and discharge condensate. Valve opening automatically adjusts to load conditions from minimum on very light loads to full lift at maximum load. Restricted orifice in Type N125L (small opening at bottom of valve seat) prevents trap from discharging continuously on light loads.

Table 1. Maximum Capacity - lbs/hr 10°F Below Saturation / Kg/hr 5°C Below Saturation

TYPE	ORIFICE		DIFFERENTIAL, psig / barg											
			5 / 0.34		10 / 0.7		20 / 1.4		50 / 3.5		100 / 6.9		125 / 8.6	
	In.	mm	Lbs/hr	Kg/hr	Lbs/hr	Kg/hr	Lbs/hr	Kg/hr	Lbs/hr	Kg/hr	Lbs/hr	Kg/hr	Lbs/hr	Kg/hr
N125L	1/8	3	216	98	265	120	375	170	592	269	778	354	838	383
N125 N125ST	1/4	6	550	249	825	374	1210	549	1975	896	2825	1281	3140	1424
N125HC N125STHC	5/16	8	860	390	1220	554	1725	783	2725	1237	3575	1623	3850	1748

Emerson recommends ISO filled Actuator for superheated steam.

Installation

1. Before installing trap, blow all dirt and scale from apparatus and piping.
2. Install trap with arrow on body in flow line as close as possible to apparatus with strainer and valve upstream of trap.
3. Pitch all drain lines toward trap.

Note

Approved practice is to install separate traps on each piece of apparatus to be drained. Steam supplied to inlets of several units may be of uniform pressure, but invariably there is a differential at the outlets. Although this differential may be small, unit discharging highest pressure will control the action of trap, while other units become air-bound and water logged. Piping upstream and downstream of trap should be at least equal to or one size larger than trap connection.

4. Record the location of the trap for maintenance accessibility.

Capacity Information

Capacity information for every Type of N125 Series is shown in Table 1.

Ordering Information

When ordering, complete the ordering guide on this page. Refer to the Specifications section on page 2.

Review the description to the right of each specification and the information in each referenced table or figure. Specify your choice whenever a selection is offered.

Ordering Guide

Type (Select One)

- Type N125
- Type N125L
- Type N125HC
- Type N125ST-FC
- Type N125STHC-FC

Body Size (Select One)

- NPS 3/8 / DN 10
- NPS 1/2 / DN 15
- NPS 3/4 / DN 20

Options (Select One)

- ST - Sterilizer Trim
- SLR - SLR Orifice
- S - Internal Stainless Strainer
- ISO - ISO Filled Actuator
- HC - High Capacity

N125 Series

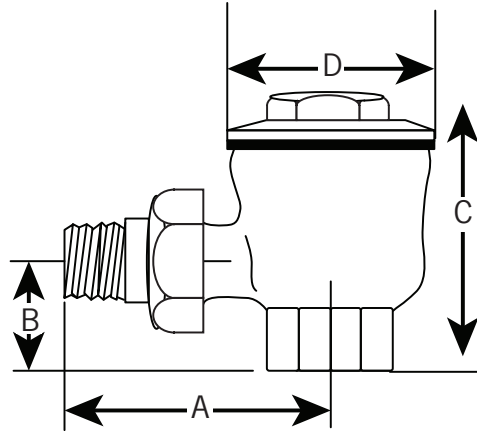


Figure 2. N125 Series Dimension

Table 2. N125 Series Dimension

BODY SIZE	A		B		C		D		WEIGHT	
	In.	mm	In.	mm	In.	mm	In.	mm	Lb	kg
NPS 3/8 and 1/2 / DN 10 and 15	2-3/4	70	1-1/8	29	2-7/8	73	2-5/32	54	1.5	0.68
NPS 3/4 / DN 20	3-3/16	81	1-9/16	40	3	76	2-5/32	54	1.8	0.82

 SpenceValve.com

Emerson

Americas

McKinney, Texas 75069 USA
T +1 800 558 5853
+1 972 548 3574

Europe

Bologna 40013, Italy
T +39 051 419 0611

Asia Pacific

Singapore 128461, Singapore
T +65 6777 8211

Middle East and Africa

Dubai, United Arab Emirates
T +971 4 811 8100

VCBUL-16244 © 2021, 2026 Emerson Electric Co. All rights reserved 03/26.
Spence is a mark owned by a subsidiary of Emerson Electric Co. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are property of their respective owners.

Neither Emerson nor any of its affiliated entities assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

